


# Miscellaneous Products

## PMC/XMC Socket Savers & Interface Adapters


Socket Savers are designed to fulfill a fundamental, but important job - wear out. They are designed to be expendable, to absorb heavy cycles of insertions and extractions of mezzanine cards. For test and development environments they are a particularly useful means to preserve investment in far more valuable host and carrier boards.

In addition to their basic function, socket savers also can be used simply to raise a mezzanine to improve access or to aid alignment for cabling, etc. Connections are routed in a one-to-one direct correspondence. Various configurations can be created by adding or removing connectors. To discuss a new configuration or a unique requirement, contact Technobox.

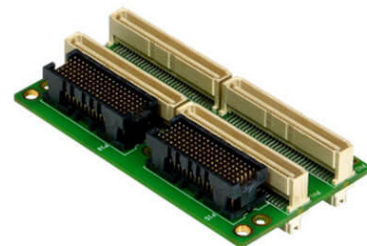

### 5239

- Connects PMC and/or XMC signals in a one to one fashion
- Prevents wear out of connectors on the host and mezzanine boards
- Provides elevation of the mezzanine card
- Aids test and debugging
- RoHS Compliant
- Commercial Temperature

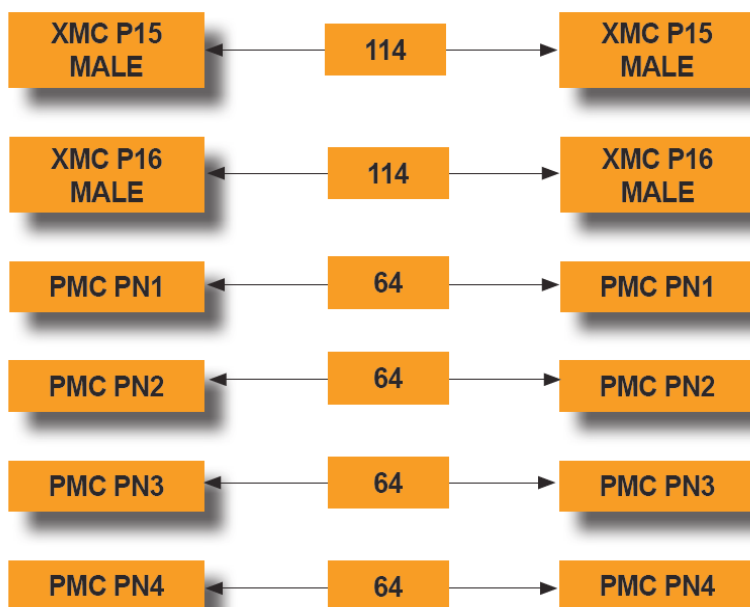


*Signals are passed one-to-one between the host/carrier board and the paired PMC or XMC. This illustration represents a socket saver with all PMC and XMC connectors installed, such as Technobox P/N 7648. Assorted socket saver configurations can be created based on population options.*

**Technobox<sup>®</sup>, inc.**

4690



5239



5361



5921



7609




7648



7772



7912



7974



5332



6718



7136



8252

## SPECIFICATIONS

**Temperature (Operating):** -40 to +85 degrees C

**Temperature (Storage):** -55 to +105 degrees C

**MTBF:** Available upon request

**Weight:** 21 - 28 grams typical

## ORDERING INFORMATION

**4690:** PMC Socket Saver / Elevator

**5239:** XMC Socket Saver / Elevator populated with VITA 42 style XMC connectors and PMC connectors

**5332:** Socket Saver Extraction Tool (optional add-on for XMC Socket Savers; can be purchased separately)

**5361:** Socket Saver (P/N 5239) with optional extractor handle (P/N 5332) installed

**5921:** XMC Socket Saver / Elevator populated with VITA 42 style connectors P15 and P16

**6718:** Cable Assy-6" Micro D9 to DB9 Female/JTAG

**7136:** Optional Mounting Kit for Technobox Socket Savers

**7609:** XMC Socket Saver w/o PMC Connectors (P/N 5921) w/ Extraction Tool Installed (P/N 5332)

**7648:** XMC Socket Saver / Elevator populated with VITA 61 (XMC2.0) and PMC connectors

**7772:** VITA 42 to VITA 61 (XMC 2.0) XMC Adapter. P15 and P16 connectors on both sides

**7912:** VITA 61 (XMC 2.0) to VITA 42 XMC Adapter. P15 and P16 connectors on both sides

**7974:** VITA 61 (XMC 2.0) to VITA 61 Socket Saver populated with VITA 61 connectors on both sides. No PMC connectors

**8252:**

# Technobox<sup>®</sup>, inc.

Copyright © Technobox 2020

DS5239-C00414

**Technobox, Inc.**

154 Cooper Road, Suite 901  
West Berlin, NJ 08091

**Phone:** 856-809-2306 • **Fax:** 856-809-2601

**Email:** sales@technobox.com

**Website:** www.technobox.com